

**Gas Strut Australia**

supplies gas struts and accessories to a broad market that includes retail, automotive, marine, medical and range of industries including process and manufacturing. Additionally, our range includes truck and trailer hardware.


**Gas Strut**

is a type of spring that, unlike a typical metal spring, uses a compressed gas contained in a cylinder and compressed by a piston, to exert a force. Our struts are manufactured in accordance with ISO/TS 16949 to maintain quality consistency through the supply chain.

**Our commitment to .....**

- deliver high-quality and reliable products, through design and development to aftersales service;
- building lasting partnerships with our customer base;
- provide a 2 Year or 20,000 cycle warranty on our quality strut range.

**STAINLESS STEEL GAS STRUTS 6/15 mm**

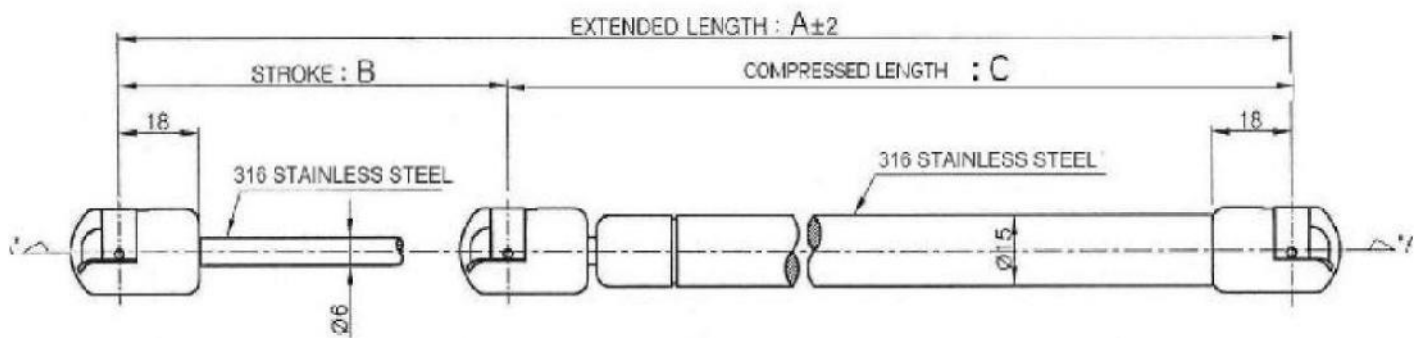

Product Code	A Extended Length	B Stroke Length	C Compressed Length	Newton Force Range
GSAS-155-110-0615	155	45	110	50-400N
GSAS-195-135-0615	195	60	135	50-400N
GSAS-235-150-0615	235	85	150	50-400N
GSAS-255-160-0615	255	95	160	50-400N
GSAS-275-175-0615	275	100	175	50-400N
GSAS-315-190-0615	315	125	190	50-400N
GSAS-375-240-0615	375	150	240	50-400N
GSAS-390-230-0615	390	160	230	50-400N

<p>Notes: 1.Manufactured to ISO/TS 16949                  2.Self-contained unit, maintenance free system.                  3.Double vulcanized sealing system.                  4.Brass guide block.                  5.SS materials per ASTM A276-10                  6.Shaft – 316L Grade rod</p>	<p>7.Tube – 316L Grade tube                  8.Operating temperature range from -25°C to +80°C                  9.Nitrogen gas filled.                  10.M6 x 1.0</p>
---	---