

**Gas Strut Australia** .....

supplies gas struts and accessories to a broad market that includes retail, automotive, marine, medical and range of industries including process and manufacturing. Additionally, our range includes truck and trailer hardware.


**Gas Strut** .....

is a type of spring that, unlike a typical metal spring, uses a compressed gas contained in a cylinder and compressed by a piston, to exert a force. Our struts are manufactured in accordance with ISO/TS 16949 to maintain quality consistency through the supply chain.

**Our commitment to** .....

- deliver high-quality and reliable products, through design and development to aftersales service;
- building lasting partnerships with our customer base;
- provide a 2 Year or 20,000 cycle warranty on our quality strut range.

**STANDARD GAS STRUTS 6/15 mm**

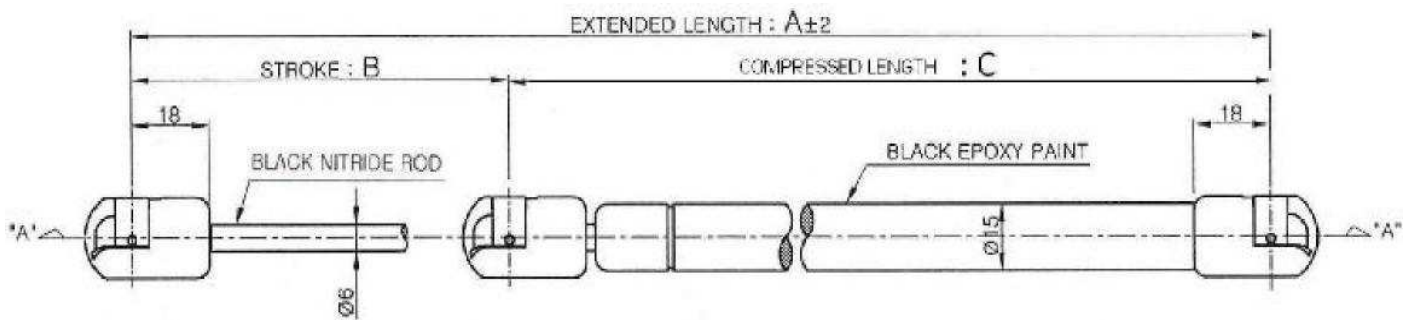

Product Code	A Extended Length	B Stroke Length	C Compressed Length	Newton Force Range
GSAU-128-098-0615	128	30	098	50 - 400N
GSAU-142-104-0615	142	35	107	50 - 400N
GSAU-145-105-0615	145	40	105	50 - 400N
GSAU-150-100-0615	150	40	110	50 - 400N
GSAU-165-115-0615	165	50	115	50 - 400N
GSAU-180-125-0615	180	55	125	50 - 400N
GSAU-195-135-0615	195	60	135	50 - 400N
GSAU-220-145-0615	220	75	145	50 - 400N
GSAU-230-150-0615	230	80	150	50 - 400N
GSAU-240-155-0615	240	85	155	50 - 400N
GSAU-250-160-0615	250	90	160	50 - 400N
GSAU-280-175-0615	280	105	175	50 - 400N
GSAU-315-190-0615	315	125	190	50 - 400N
GSAU-330-200-0615	330	130	200	50 - 400N
GSAU-340-205-0615	340	135	205	50 - 400N
GSAU-355-210-0615	355	145	210	50 - 400N
GSAU-375-220-0615	375	155	220	50 - 400N
GSAU-380-225-0615	380	155	225	50 - 400N
GSAU-410-240-0615	410	170	240	50 - 400N
GSAU-430-250-0615	430	180	250	50 - 400N
GSAU-500-285-0615	500	215	285	50 - 400N

Notes: 1:Manufactured to ISO/TS 16949  
 2:Self-contained unit, maintenance free system.  
 3:Double vulcanized sealing system.  
 4:Brass guide block.  
 5:Shaft (ASTM A29) K1045 Grade hardened rods  
 6:Shaft - Black nitride (Ferritic Nitrocarburised)  
 7:Tube (ASTM A513) Grade1010 tube  
 8:Tube steel Epoxy coated black  
 9:Operating temperature range from -25°C to +80°C  
 10:Nitrogen gas filled.  
 11:Thread M6 x 1.0