

Gas Strut Australia

supplies gas struts and accessories to a broad market that includes retail, automotive, marine, medical and range of industries including process and manufacturing. Additionally, our range includes truck and trailer hardware.


Gas Strut

is a type of spring that, unlike a typical metal spring, uses a compressed gas contained in a cylinder and compressed by a piston, to exert a force. Our struts are manufactured in accordance with ISO/TS 16949 to maintain quality consistency through the supply chain.

Our commitment to

- deliver high-quality and reliable products, through design and development to aftersales service;
- building lasting partnerships with our customer base;
- provide a 2 Year or 20,000 cycle warranty on our quality strut range.

STANDARD GAS STRUTS 8/18 mm

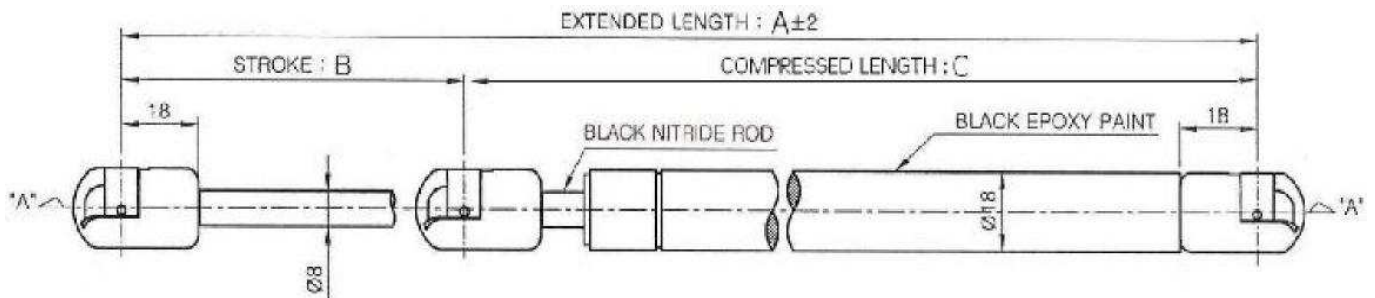

Product Code	A Extended Length	B Stroke Length	C Compressed Length	Newton Force Range
GSAU-175-125-0818	175	50	125	50 - 700N
GSAU-195-135-0818	195	60	135	50 - 700N
GSAU-220-150-0818	220	70	150	50 - 700N
GSAU-230-155-0818	230	75	155	50 - 700N
GSAU-245-160-0818	245	85	160	50 - 700N
GSAU-250-160-0818	250	90	160	50 - 700N
GSAU-265-170-0818	265	95	170	50 - 700N
GSAU-275-175-0818	275	100	175	50 - 700N
GSAU-290-180-0818	290	110	180	50 - 700N
GSAU-305-190-0818	305	115	190	50 - 700N
GSAU-315-195-0818	315	120	195	50 - 700N
GSAU-320-200-0818	320	120	200	50 - 700N
GSAU-330-205-0818	330	125	205	50 - 700N
GSAU-336-206-0818	336	130	206	50 - 700N
GSAU-340-205-0818	340	135	205	50 - 700N
GSAU-350-215-0818	350	135	215	50 - 700N
GSAU-365-220-0818	365	145	220	50 - 700N
GSAU-375-225-0818	375	150	225	50 - 700N
GSAU-385-230-0818	385	155	230	50 - 700N
GSAU-405-240-0818	405	165	240	50 - 700N
GSAU-410-245-0818	410	165	245	50 - 700N
GSAU-415-245-0818	415	170	245	50 - 700N
GSAU-430-250-0818	430	180	250	50 - 700N
GSAU-470-275-0818	470	195	275	50 - 700N
GSAU-485-280-0818	485	205	280	50 - 700N

Product Code	A Extended Length	B Stroke Length	C Compressed Length	Newton Force Range
GSAU-500-290-0818	500	210	290	50 - 700N
GSAU-505-290-0818	505	215	290	50 - 700N
GSAU-510-295-0818	510	215	295	50 - 700N
GSAU-520-295-0818	520	225	295	50 - 700N
GSAU-525-300-0818	525	225	300	50 - 700N
GSAU-535-305-0818	535	230	305	50 - 700N
GSAU-540-305-0818	540	235	305	50 - 700N
GSAU-550-310-0818	550	240	310	50 - 700N
GSAU-565-320-0818	565	245	320	50 - 700N
GSAU-575-325-0818	575	250	325	50 - 700N
GSAU-585-330-0818	585	255	330	50 - 700N
GSAU-595-335-0818	595	260	335	50 - 700N
GSAU-600-335-0818	600	265	335	50 - 700N
GSAU-615-345-0818	615	270	345	50 - 700N
GSAU-630-355-0818	630	275	355	50 - 700N
GSAU-650-365-0818	650	285	365	50 - 700N
GSAU-670-375-0818	670	295	375	50 - 700N
GSAU-680-385-0818	680	305	385	50 - 700N
GSAU-700-385-0818	700	315	385	50 - 700N
GSAU-720-395-0818	720	325	395	50 - 700N
GSAU-730-400-0818	730	330	400	50 - 700N
GSAU-750-410-0818	750	340	410	50 - 700N
GSAU-775-425-0818	775	350	425	50 - 700N
GSAU-800-435-0818	800	365	435	50 - 500N

<p>Notes: 1:Manufactured to ISO/TS 16949 2:Self-contained unit, maintenance free system. 3:Double vulcanized sealing system. 4:Brass guide block. 5:Shaft (ASTM A29) K1045 Grade hardened rods 6:Shaft - Black nitride (Ferritic Nitrocarburised)</p>	<p>7:Tube (ASTMA513) Grade1010 tube 8:Tube steel Epoxy coated black 9:Operating temperature range from -25°C to +80°C 10:Nitrogen gas filled. 11:Thread M6 x 1.0</p>
--	--