

Gas Strut Australia

supplies gas struts and accessories to a broad market that includes retail, automotive, marine, medical and range of industries including process and manufacturing. Additionally, our range includes truck and trailer hardware.


Gas Strut

is a type of spring that, unlike a typical metal spring, uses a compressed gas contained in a cylinder and compressed by a piston, to exert a force. Our struts are manufactured in accordance with ISO/TS 16949 to maintain quality consistency through the supply chain.

Our commitment to

- deliver high-quality and reliable products, through design and development to aftersales service;
- building lasting partnerships with our customer base;
- provide a 2 Year or 20,000 cycle warranty on our quality strut range.

STANDARD GAS STRUTS 1 1/2" 28 mm

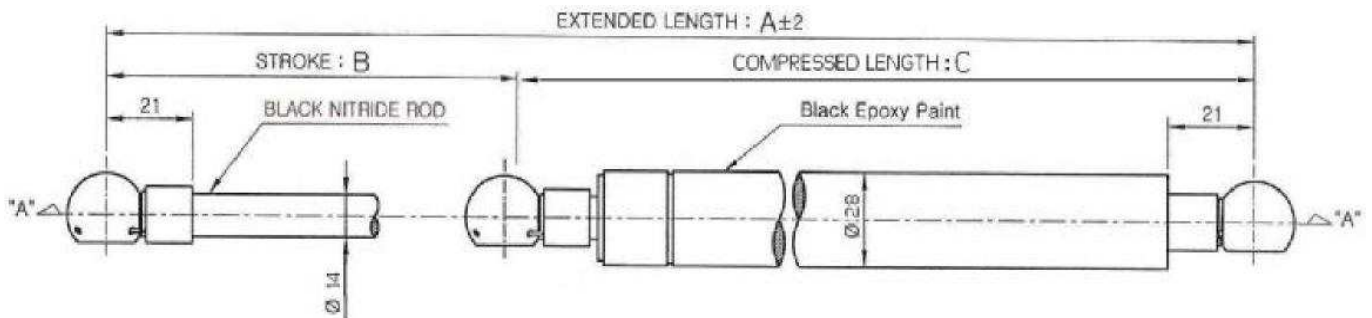

Product Code	A Extended Length	B Stroke Length	C Compressed Length	Newton Force Range
GSAU-195-135-1428	195	60	135	50 – 2200N
GSAU-250-165-1428	250	85	165	50 - 2200N
GSAU-295-190-1428	295	105	190	50 - 2200N
GSAU-330-205-1428	330	125	205	50 - 2200N
GSAU-375-230-1428	375	145	230	50 - 2200N
GSAU-405-245-1428	405	160	245	50 - 2200N
GSAU-430-255-1428	430	175	255	50 - 2200N
GSAU-450-265-1428	450	185	265	50 - 2200N
GSAU-485-285-1428	485	200	285	50 - 2200N
GSAU-505-295-1428	505	210	295	50 - 2200N
GSAU-525-305-1428	525	220	305	50 - 2200N
GSAU-550-315-1428	550	235	315	50 - 2200N
GSAU-600-340-1428	600	260	340	50 - 2200N
GSAU-630-355-1428	630	275	355	50 - 2200N
GSAU-640-360-1428	640	280	360	50 - 2200N
GSAU-650-365-1428	650	285	365	50 - 2200N
GSAU-670-375-1428	670	295	375	50 – 2200N
GSAU-700-390-1428	700	310	390	50 - 2200N
GSAU-720-400-1428	720	320	400	50 - 2200N
GSAU-730-405-1428	730	325	405	50 - 2200N
GSAU-750-415-1428	750	335	415	50 - 2000N
GSAU-800-440-1428	800	360	440	50 - 2000N
GSAU-830-455-1428	830	375	455	50 - 2000N

Product Code	A Extended Length	B Stroke Length	C Compressed Length	Newton Force Range
GSAU-850-470-1428	850	380	470	50 - 2000N
GSAU-885-485-1428	885	400	485	50 - 2000N
GSAU-900-495-1428	900	405	495	50 - 2000N
GSAU-940-515-1428	940	425	515	50 - 2000N
GSAU-1100-595-1428	1100	505	595	50 - 1800N
GSAU-1200-645-1428	1200	555	645	50 - 1800N
Notes: 1:Manufactured to ISO/TS 16949 2:Self-contained unit, maintenance free system. 3:Double vulcanized sealing system. 4:Brass guide block. 5:Shaft (ASTM A29) K1045 Grade hardened rods 6:Shaft - Black nitride (Ferritic Nitrocarburised)		7:Tube (ASTMA513) Grade1010 tube 8:Tube steel Epoxy coated black 9:Operating temperature range from -25°C to +80°C 10:Nitrogen gas filled. 11:M10 x 1.5		